

Digital BTE high power 4 channel Hearing Aid.


Features:

- Volume control
- Memory choice button
- Mode switch (O-T-M)
- Programmable telecoil
- Direct Audio Input
- Summing input modes
- 12 band equalizer
- 4 channel WDRC
- Up to 4 memories
- Adaptive feedback cancelation
- Adaptive noise cancelation
- Dynamic contrast detector for soft speech enhancing
- Wide input dynamic range
- Advanced algorithms of fitting (Fig.6, NAL-NL1 etc.)
- Low battery programmable signal
- Memory change programmable signal





Digital 4 channel Hearing Aid in modern case with 4 memories for moderate and severe loss

Suggested fitting range

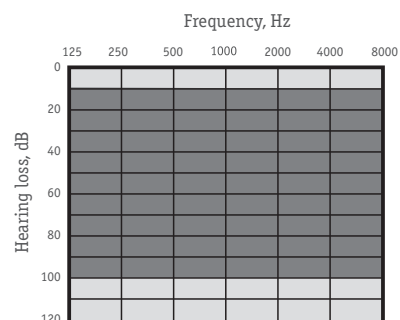

Reference 44P

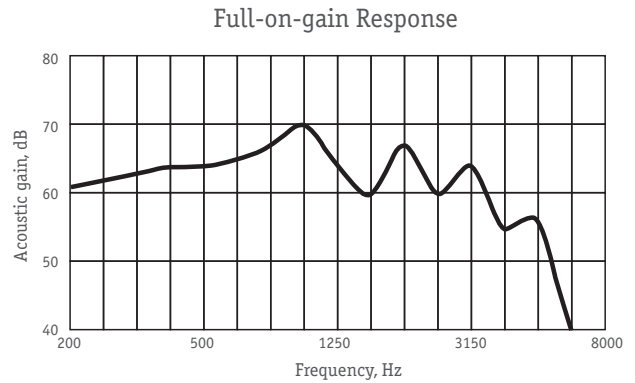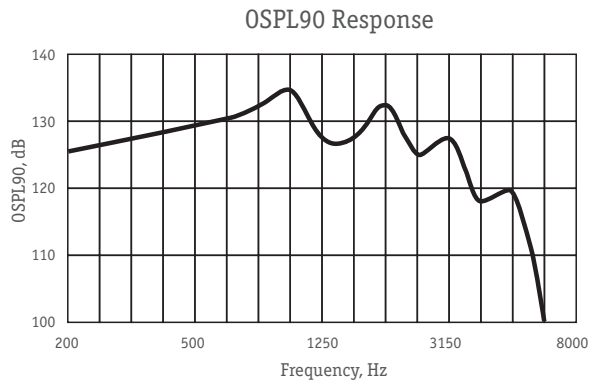

Performance data
In accordance with IEC 60118-7 (2 cc coupler)

Full-on-Gain Peak, dB	70±5
Max. Output (OSPL90), dB	134±4
Frequency Range, Hz,	100-5000
Equivalent Input Noise, dBA, max	24
Total Harmonic Distortion at RTG, % max	5
Maximum Telecoil Sensitivity, FOG input 10mA/m at RTF, dB	100
WDRC channels	4
Memories	4
Equalizer bands	12
Battery Current at RTG, mA, max	1,5
Battery Type	675
Battery Life, hrs, average	200
Mass w/o battery, g, max	5