

---

# Digital 4-trimmers high power 2 channel BTE Hearing aid

## Features:

- Volume control
- 2 channel WDRC
- 2 memories
- Telecoil

## Trimmers:


H – low frequency control

L – high frequency control


Reference  
22P TR

# Reference 22P TR


OSPL90 Response

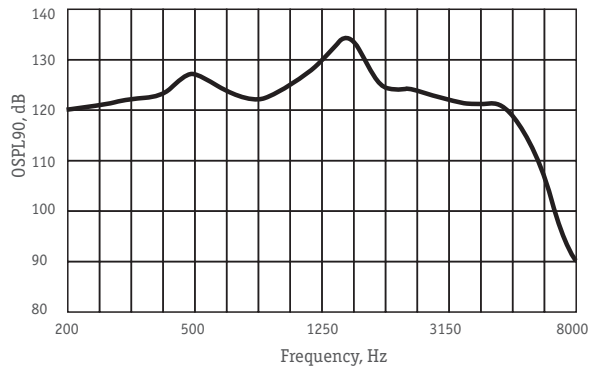


Full-on-gain Response

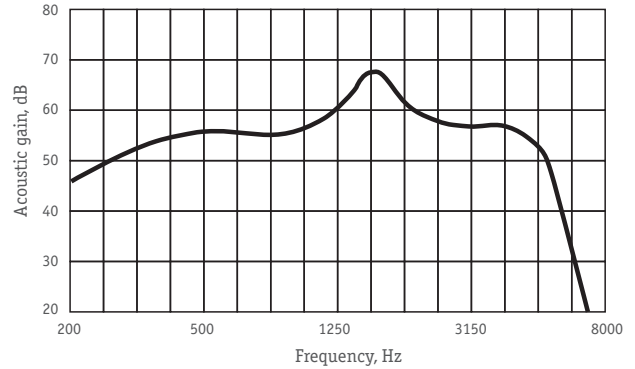

High frequency control

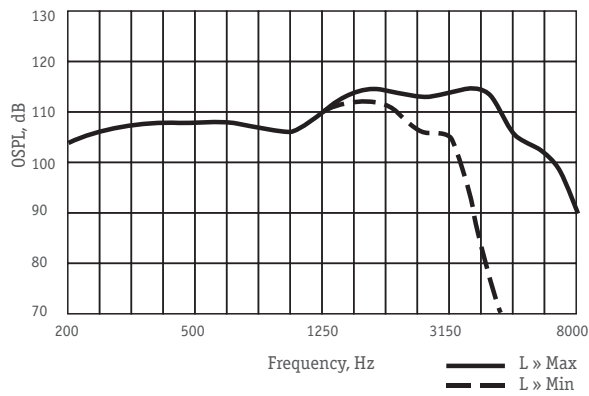

Low frequency control

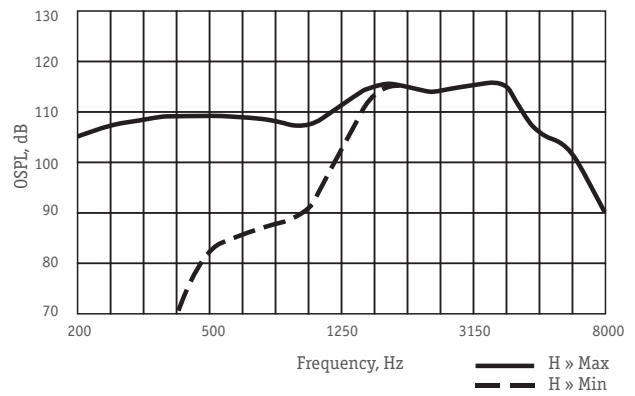

## Performance data In accordance with IEC 60118-7 (2 cc coupler)

Full-on-Gain Peak, dB	68 ± 5
Max. Output (OSPL90), dB	134 ± 4
Frequency Range, Hz,	200-5500
Equivalent Input Noise, dBA, max	24
Total Harmonic Distortion at RTG, % max	5
Maximum Telecoil Sensitivity, FOG input 10mA/m at RTF, dB	100
WDRC channels	2
Memories	2
Battery Current at RTG, mA, max	0,9
Battery Type	675
Battery Life, hrs, average	430
Mass w/o battery, g, max	5

