

Digital BTE super power 4 channel Hearing Aid

Features:

- Volume control
- Memory choice button
- Programmable telecoil
- Audio Input
- 12-band equalizer
- Tone generator for In-Situ fitting
- O-T-M switch
- 4 channel WDRC
- Up to 5 memories


- Advanced Adaptive Feedback Cancellation (Feedback Fighter)
- 10-band Layered Noise Cancellation (NoiseOFF)
- Dynamic Contrast Detection for soft speech enhancing (SpeechKey)

- Input Signals Mixing (MixIn)
- Programmable low battery signals
- Programmable memory change signals
- Programmable power-on delay




Digital 4-channels Hearing Aid with 5 memories for severe losses

Suggested fitting range

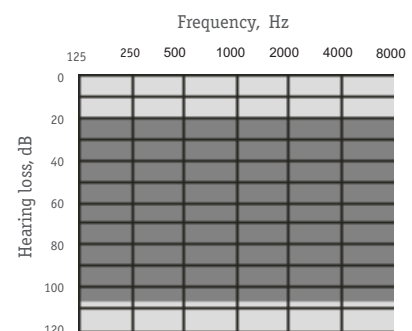


Folk 45PP

Full-On-Gain Response

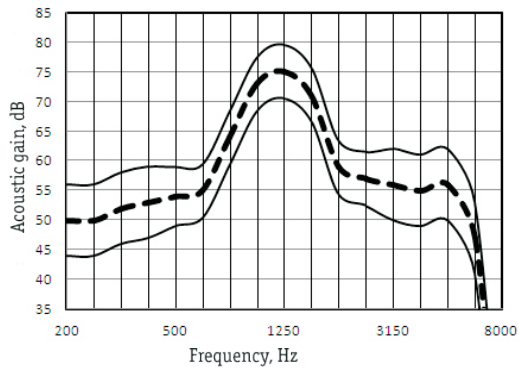

OSPL90 Response

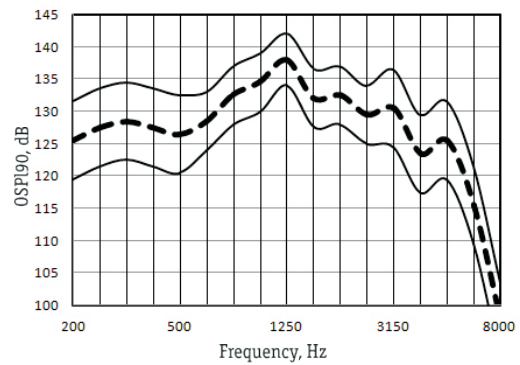

Main features

In accordance with IEC 60118-7 (2 cc coupler)

Full-on-Gain Peak, dB	75±5
Max. Output (OSPL90), dB	138±4
Frequency Range, Hz	100-6000
Equivalent Input Noise, dBA, max	24
Total Harmonic Distortion at RTG, % max	5
Maximum Telecoil Sensitivity, FOG input 10mA/m at RTF, dB	110
WDRC channels	4
Memories	5
Equalizer bands	12
Battery Current at RTG, mA, max	1,5
Battery Type	13
Battery Life, hrs, average	350
Mass w/o battery, g, max	5