

Digital BTE high power 8 channel Hearing Aid


Features:

- Volume control
 - Memory choice button
 - Programmable telecoil
 - Audio Input
 - 12-band equalizer
 - Tinnitus - masker (TinniMask)
 - Tone generator for In-Situ fitting
 - O-T-M switch
 - 8 channel WDRC
 - Up to 5 memories
-
- Advanced Adaptive Feedback Cancelation (Feedback Fighter)
 - 12-band Layered Noise Cancelation (NoiseOFF)
 - Dynamic contrast detection for soft speech enhancing (SpeechKey)
-
- Work Diary
 - Input signals mixing (MixIn)
 - Programmable low battery signals
 - Programmable memory change signals
 - Programmable power-on delay




Digital 8-channels Hearing Aid with 5 memories for moderate and severe losses

Suggested fitting range

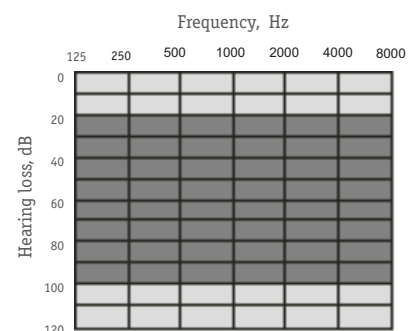


Folk 85P

Full-On-Gain Response

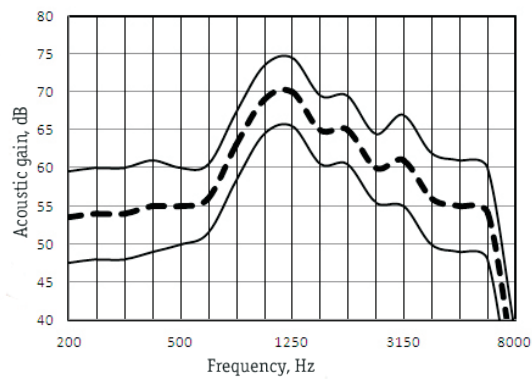

OSPL90 Response

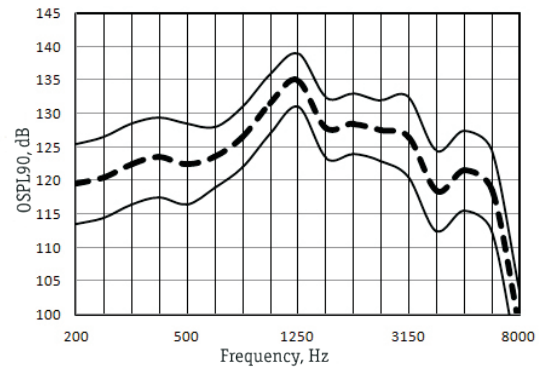

Main features
In accordance with IEC 60118-7 (2 cc coupler)

Full-on-Gain Peak, dB	70±5
Max. Output (OSPL90), dB	135±4
Frequency Range, Hz	50-6300
Equivalent Input Noise, dBA, max	24
Total Harmonic Distortion at RTG, % max	5
Maximum Telecoil Sensitivity, FOG input 10mA/m at RTF, dB	100
WDR channels	8
Memories	5
Equalizer bands	12
Battery Current at RTG, mA, max	1,4
Battery Type	13
Battery Life, hrs, average	375
Mass w/o battery, g, max	5