

Refer

Digital trimmer mini-BTE Hearing aid in titanium case

Features:

- Volume control
- 2 channel WDRC
- Adaptive feedback cancelation
- Adaptive noise cancelation

Trimmers:

H – low frequency control

M – middle frequency control


L – high frequency control

Referenc
Titan


Suggested fitting range

Reference Titan TR


OSPL90 Response

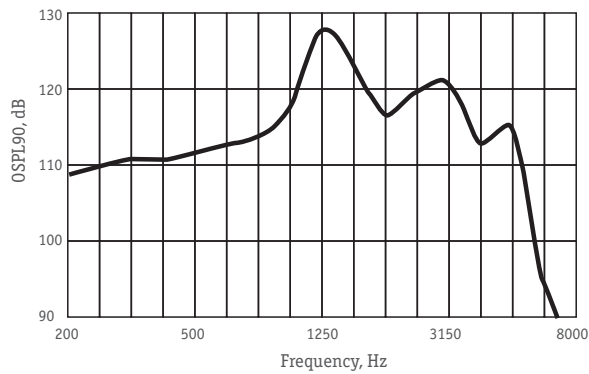


Full-on-gain Response

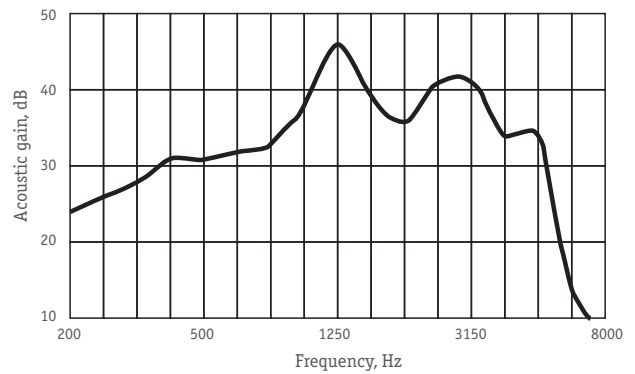

High frequency control

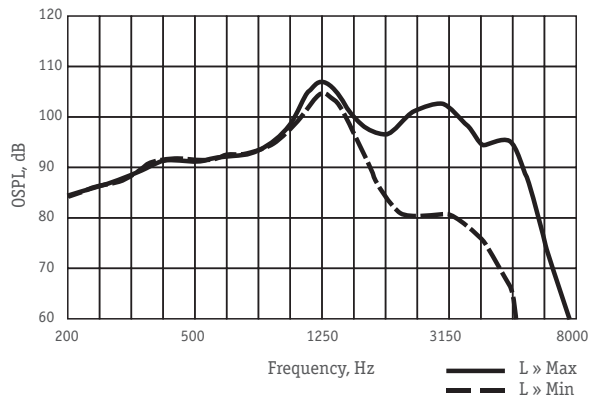

Low frequency control

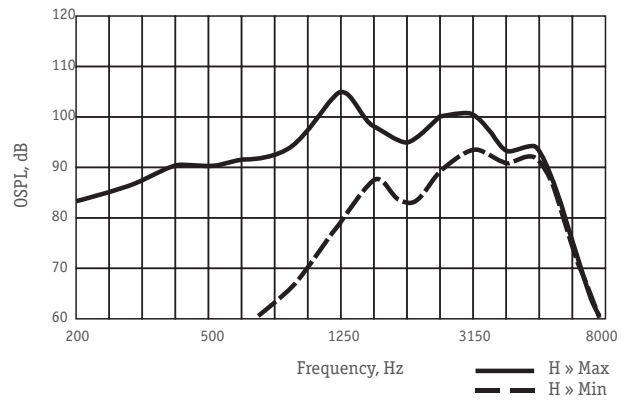

Performance data In accordance with IEC 60118-7 (2 cc coupler)

Full-on-Gain Peak, dB	46 ± 5
Max. Output (OSPL90), dB	128 ± 4
Frequency Range, Hz,	200-4500
Equivalent Input Noise, dBA, max	20
Total Harmonic Distortion at RTG, % max	5
WDRC channels	2
Memories	1
Battery Current at RTG, mA, max	0,95
Battery Type	312
Battery Life, hrs, average	200
Mass w/o battery, g, max	5