

Digital BTE super power 8 channel Hearing Aid

Features:

- Volume control
- Memory choice button
- Programmable telecoil
- Audio Input
- 12-band equalizer
- Tinnitus - masker (TinniMask)
- Tone generator for In-Situ fitting
- O-T-M switch
- 8 channel WDRC
- Up to 5 memories


- Advanced Adaptive Feedback Cancelation (Feedback Fighter)
- 12-band Layered Noise Cancelation (NoiseOFF)
- Dynamic contrast detection for soft speech enhancing (SpeechKey)

- Work Diary
- Input signals mixing (MixIn)
- Programmable low battery signals
- Programmable memory change signals
- Programmable power-on delay




Digital 8-channels Hearing Aid with 5 memories for moderate and severe losses

Suggested fitting range

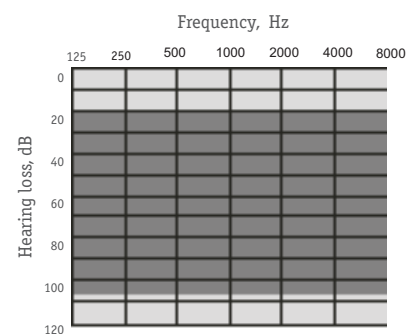


Folk 85PP

Full-On-Gain Response

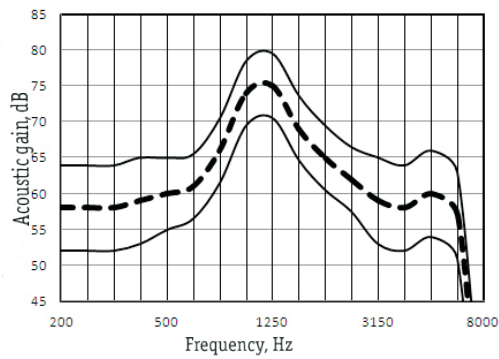

OSPL90 Response

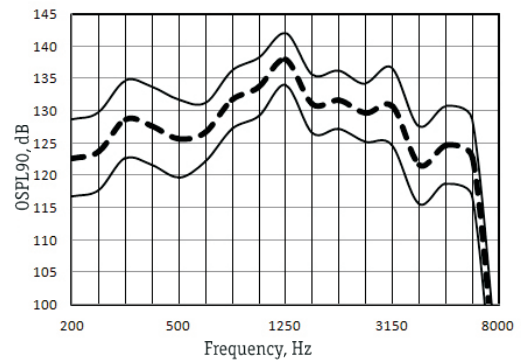

Main features

In accordance with IEC 60118-7 (2 cc coupler)

Full-on-Gain Peak, dB	75±5
Max. Output (OSPL90), dB	138±4
Frequency Range, Hz	100-5800
Equivalent Input Noise, dBA, max	24
Total Harmonic Distortion at RTG, % max	5
Maximum Telecoil Sensitivity, FOG input 10mA/m at RTF, dB	110
WDR channels	8
Memories	5
Equalizer bands	12
Battery Current at RTG, mA, max	1,5
Battery Type	13
Battery Life, hrs, average	350
Mass w/o battery, g, max	5