

## Digital BTE high power Hearing Aid with dual-microphone directional system


### Features:

- Volume control
- Memory choice button
- Programmable telecoil
- Audio Input
- 12-band equalizer
- Tinnitus - masker (TinniMask)
- Tone generator for In-Situ fitting
- Dual-microphone directional system (Direct Mic)
- 8 channel WDRC
- Up to 4 memories
- Advanced Adaptive Feedback Cancelation (Feedback Fighter)
- 12-band Layered Noise Cancelation (NoiseOFF)
- Dynamic contrast detection for soft speech enhancing (SpeechKey)
- Work Diary
- Input signals mixing (MixIn)
- Programmable low battery signals
- Programmable memory change signals
- On/Off switch built into battery door
- Programmable power-on delay




Digital 8-channels Hearing Aid with 4 memories for moderate and severe losses

### Suggested fitting range

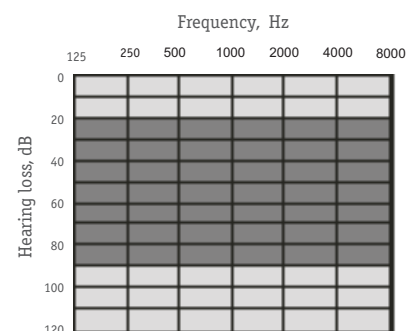


# Folk 84DM

**Full-On-Gain Response**

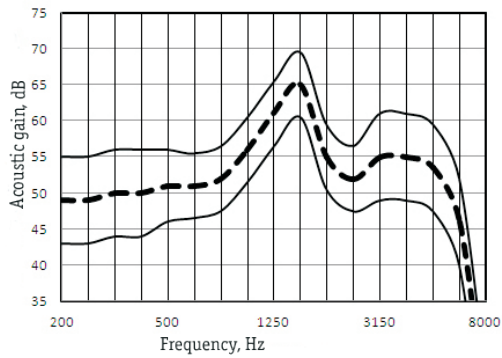

**OSPL90 Response**

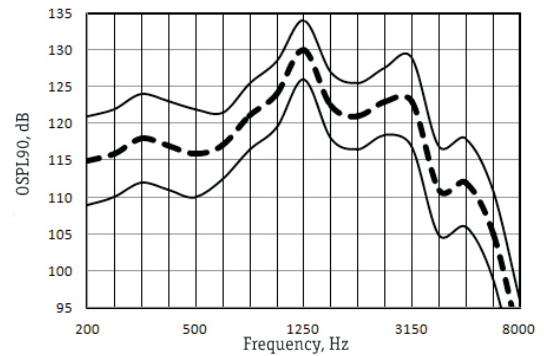

## Main features

### In accordance with IEC 60118-7 (2 cc coupler)

Full-on-Gain Peak, dB	65±5
Max. Output (OSPL90), dB	130±4
Frequency Range, Hz	50-6600
Equivalent Input Noise, dBA, max	24
Total Harmonic Distortion at RTG, % max	5
Maximum Telecoil Sensitivity, FOG input 10mA/m at RTF, dB	95
WDRC channels	8
Memories	4
Equalizer bands	12
Battery Current at RTG, mA, max	1,2
Battery Type	13
Battery Life, hrs, average	460
Mass w/o battery, g, max	5