

Digital BTE 4 channel Hearing Aid with Open Fit technology


Features:

- Volume control
 - Memory choice button
 - Programmable telecoil
 - Audio Input
 - 12-band equalizer
 - Tone generator for In-Situ fitting
 - O-T-M switch
 - 4 channel WDRC
 - Up to 5 memories
 - Open Fit earmolds
-
- Advanced Adaptive Feedback Cancellation (Feedback Fighter)
 - 10-band Layered Noise Cancellation (NoiseOFF)
 - Dynamic Contrast Detection for soft speech enhancing (SpeechKey)
-
- Input Signals Mixing (MixIn)
 - Programmable low battery signals
 - Programmable memory change signals
 - Programmable power-on delay




Digital 4-channels Hearing Aid with 5 memories for mild and moderate losses

Suggested fitting range

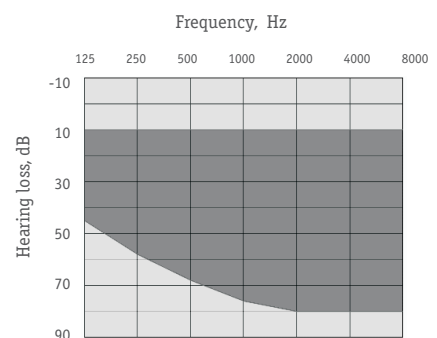


Folk 450F

Full-On-Gain Response

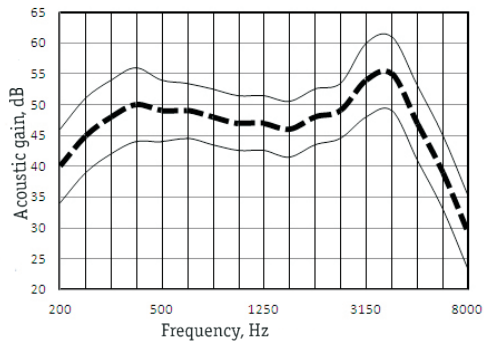

OSPL90 Response

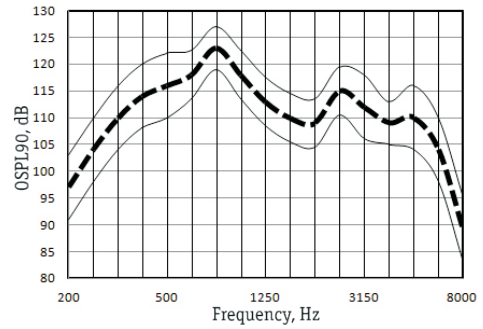

Main features
In accordance with IEC 60118-7 (2 cc coupler)

Full-on-Gain Peak, dB	55±5
Max. Output (OSPL90), dB	123±4
Frequency Range, Hz	150-7100
Equivalent Input Noise, dBA, max	24
Total Harmonic Distortion at RTG, % max	5
Maximum Telecoil Sensitivity, FOG input 10mA/m at RTF, dB	93
WDRC channels	4
Memories	5
Equalizer bands	12
Battery Current at RTG, mA, max	1,1
Battery Type	13
Battery Life, hrs, average	460
Mass w/o battery, g, max	5