


Digital BTE 4 channel Hearing Aid with dual-microphone directional system and RIC technology


Features:

- Memory choice button
- 12-band equalizer
- Tone generator for In-Situ fitting
- Dual-microphone directional system (Direct Mic)
- 4 channel WDRC
- Up to 4 memories
- Receiver In the Canal (RIC)
- Advanced Adaptive Feedback Cancellation (Feedback Fighter)
- 10-band Layered Noise Cancellation (Noise Off)
- Dynamic Contrast Detection for soft speech enhancing (SpeechKey)
- Programmable low battery signals
- Programmable memory change signals
- Programmable power-on delay
- On/Off switch built into battery door

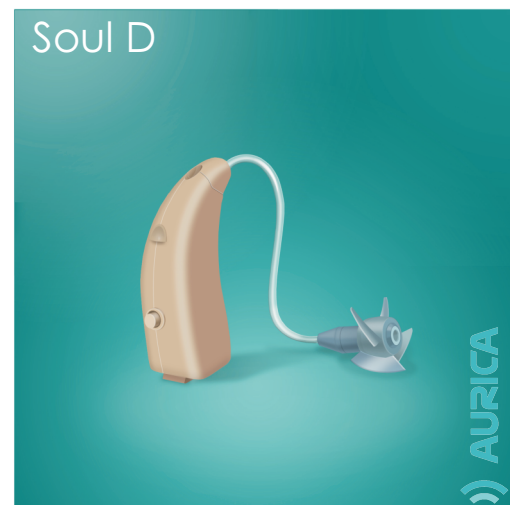


Digital 4-channels Hearing Aid with 4 memories for mild losses

Suggested fitting range

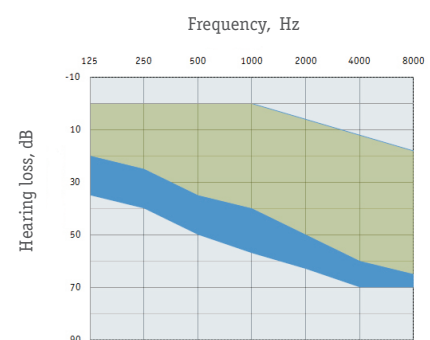


Soul D


**Full-On-Gain Response
(standard receiver)**

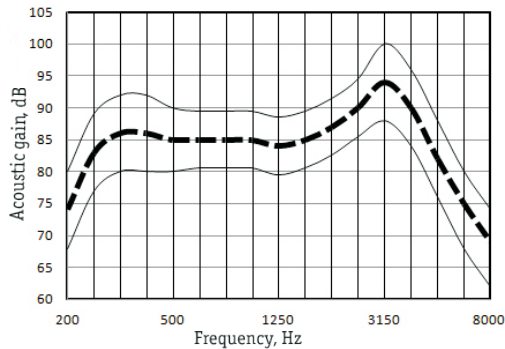


**OSPL90 Response
(standard receiver)**

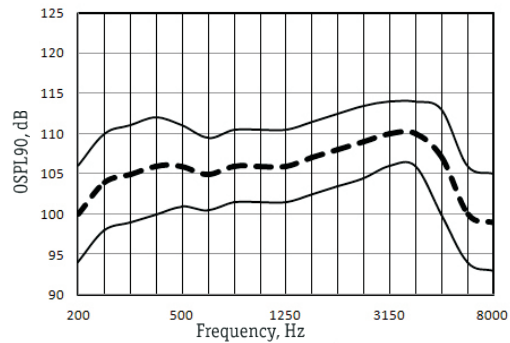

**Full-On-Gain Response
(wideband receiver)**

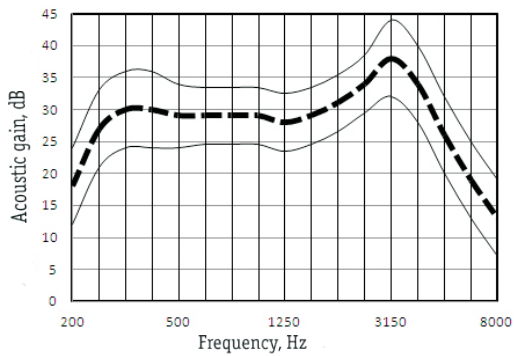

**OSPL90 Response
(wideband receiver)**

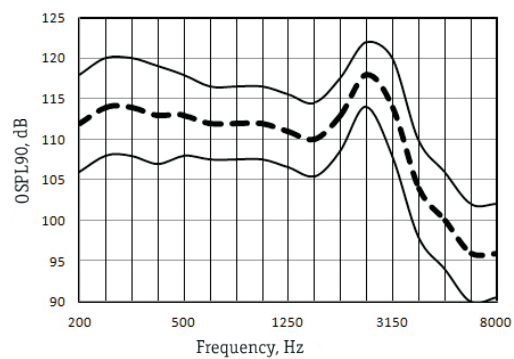

**Main features
In accordance with IEC 60118-7 (2 cc coupler)**

Full-on-Gain Peak, dB	(43/38)±5
Max. Output (OSPL90), dB	(118/110)±4
Frequency Range, Hz	200-8000
Equivalent Input Noise, dBA, max	27
Total Harmonic Distortion at RTG, % max	2
WDRC channels	4
Memories	4
Equalizer bands	12
Battery Current at RTG, mA, max	0,8
Battery Type	10
Battery Life, hrs, average	80
Mass w/o battery, g, max	3

Note: first value - for wideband receiver, second value - for standard receiver.