


Digital BTE 4 channel Hearing Aid with RIC technology


Features:

- Memory choice button
- Programmable telecoil
- 12-band equalizer
- 4 channel WDRC
- Up to 4 memories
- Receiver In the Canal (RIC)
- Advanced Adaptive Feedback Cancellation (Feedback Fighter)
- 10-band Layered Noise Cancellation (Noise Off)
- Dynamic Contrast Detection for soft speech enhancing (SpeechKey)
- Programmable low battery signals
- Programmable memory change signals
- On/Off switch built into battery door

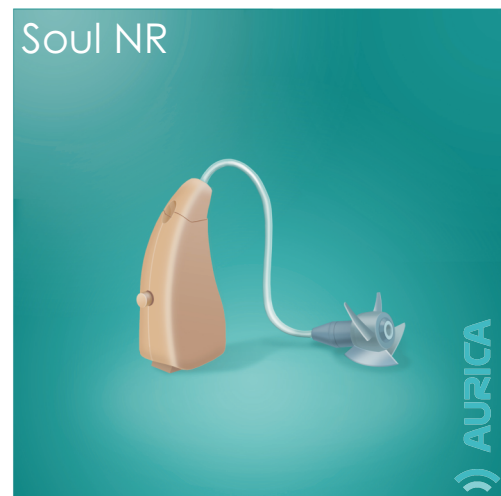


Digital 4-channels Hearing Aid with 4 memories for mild losses

Suggested fitting range

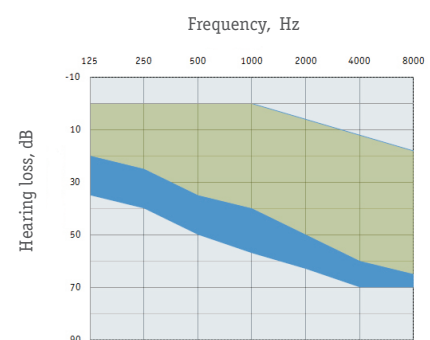


Soul NR


**Full-On-Gain Response
(standard receiver)**

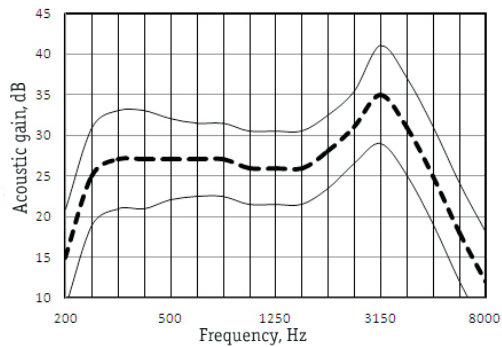


**OSPL90 Response
(standard receiver)**

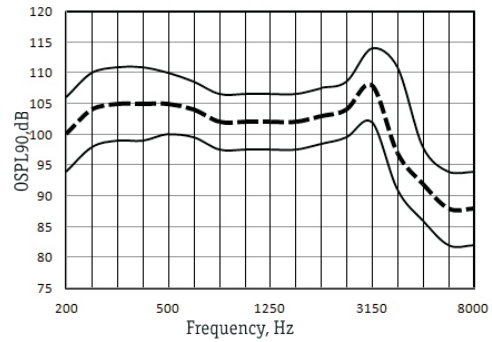

**Full-On-Gain Response
(wideband receiver)**

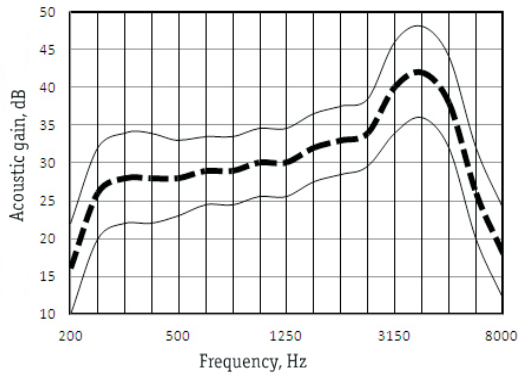

**OSPL90 Response
(wideband receiver)**

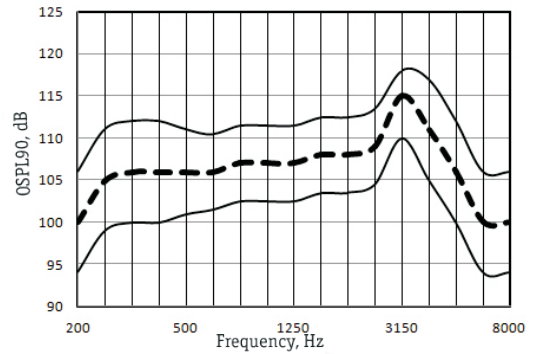

Main features

In accordance with IEC 60118-7 (2 cc coupler)

Full-on-Gain Peak, dB	(42/35)±5
Max. Output (OSPL90), dB	(114/110)±4
Frequency Range, Hz	200-8000
Equivalent Input Noise, dBA, max	27
Total Harmonic Distortion at RTG, % max	2
Maximum Telecoil Sensitivity, FOG input 10mA/m at RTF, dB	83
WDRC channels	4
Memories	4
Equalizer bands	12
Battery Current at RTG, mA, max	0,8
Battery Type	10
Battery Life, hrs, average	80
Mass w/o battery, g, max	3

Note: first value - for wideband receiver, second value - for standard receiver.