

Digital BTE high power 2 channel Hearing Aid in miniature case

Features:


- Volume control
- Telecoil
- 10 band equalizer
- 2 channel WDRC
- 2 memories
- O-T-M switch

- Controllable notch filter for feedback cancelation
(high gain w/o FB)
- Fine gain tuning in the whole frequency range
- Low battery signals
- Memory change signals





Miniature Hearing Aid with 2 memories for moderate and severe loss

Suggested fitting range

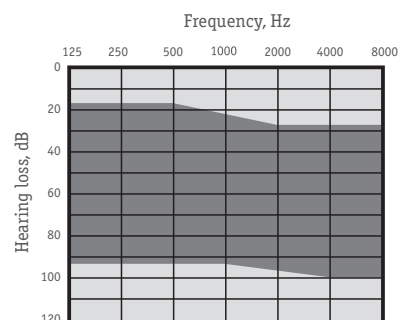

Reference A1

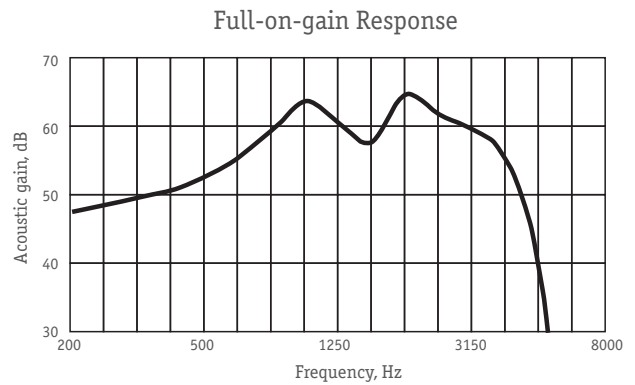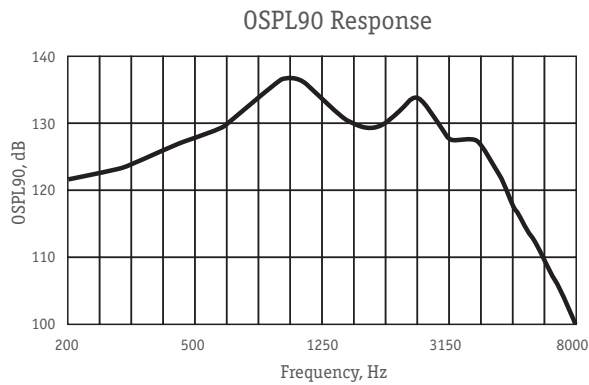

Performance data
In accordance with IEC 60118-7 (2 cc coupler)

Full-on-Gain Peak, dB	65±5
Max. Output (OSPL90), dB	137±4
Frequency Range, Hz,	160-4500
Equivalent Input Noise, dBA, max	26
Total Harmonic Distortion at RTG, % max	5
Maximum Telecoil Sensitivity, FOG input 10mA/m at RTF, dB	110
WDRC channels	2
Memories	2
Equalizer bands	10
Battery Current at RTG, mA, max	0,83
Battery Type	13
Battery Life, hrs, average	200
Mass w/o battery, g, max	5