


Digital BTE 4 channel Hearing Aid with dual-microphone directional system and Open Fit technology


Features:

- Memory choice button
- Programmable telecoil
- Dual-microphone directional system (Direct Mic)
- Audio Input
- 12-band equalizer
- Tone generator for In-Situ fitting
- 4 channel WDRC
- Up to 4 memories
- Open Fit earmolds
- Advanced Adaptive Feedback Cancellation (Feedback Fighter)
- 10-band Layered Noise Cancellation (Noise OFF)
- Dynamic Contrast Detection for soft speech enhancing (SpeechKey)
- Input Signals Mixing (MixIn)
- Programmable low battery signals
- Programmable memory change signals
- Programmable power-on delay
- On/Off switch built into battery door

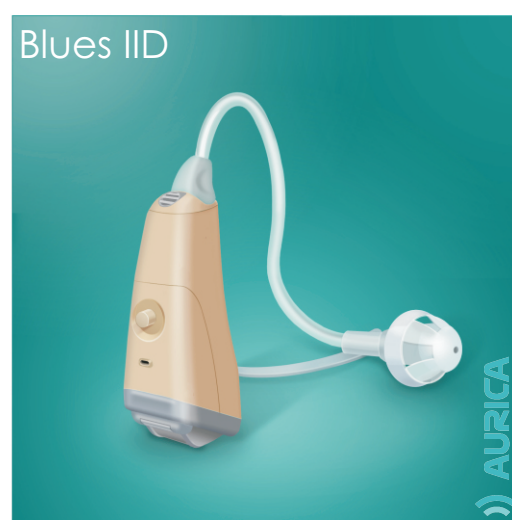


Digital 4-channels Hearing Aid with 4 memories for mild losses

Suggested fitting range

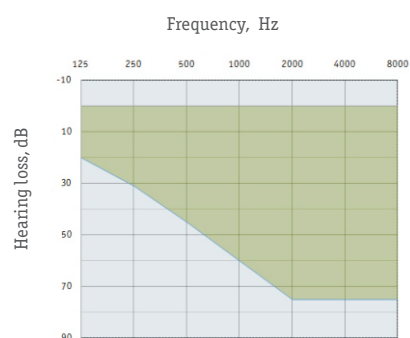


Blues IID

Full-On-Gain Response

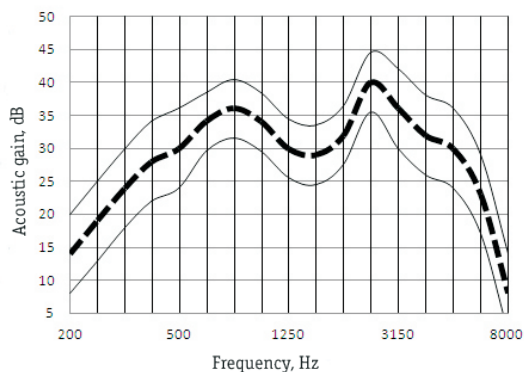

OSPL90 Response

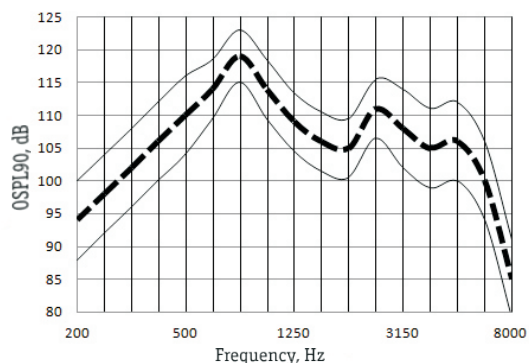

**Main features
In accordance with IEC 60118-7 (2 cc coupler)**

Full-on-Gain Peak, dB	40±5
Max. Output (OSPL90), dB	119±4
Frequency Range, Hz	200-7000
Equivalent Input Noise, dBA, max	26
Total Harmonic Distortion at RTG, % max	2
Maximum Telecoil Sensitivity, FOG input 10mA/m at RTF, dB	80
WDRC channels	4
Memories	4
Equalizer bands	12
Battery Current at RTG, mA, max	1,2
Battery Type	10
Battery Life, hrs, average	120
Mass w/o battery, g, max	3