

## Digital BTE 8 channel Hearing Aid with dual-microphone directional system and Open Fit technology


### Features:

- Memory choice button
- Programmable telecoil
- Tinnitus-masker (TinniMask)
- Dual-microphone directional system (Direct Mic)
- Audio Input
- 12-band equalizer
- Tone generator for In-Situ fitting
- 8 channel WDRC
- Up to 4 memories
- Open Fit earmolds
- Advanced Adaptive Feedback Cancelation (Feedback Fighter)
- 12-band Layered Noise Cancelation (Noise OFF)
- Dynamic Contrast Detection for soft speech enhancing (SpeechKey)
- Work Diary
- Input Signals Mixing (MixIn)
- Programmable low battery signals
- Programmable memory change signals
- Programmable power-on delay
- On/Off switch built into battery door




Digital 8-channels Hearing Aid with 4 memories for mild losses

### Suggested fitting range

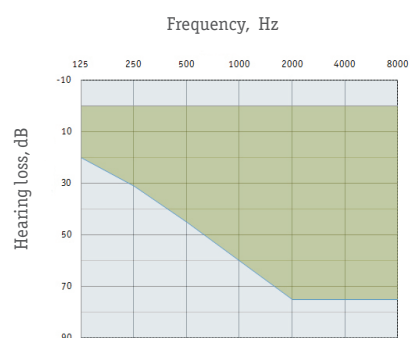


# Blues IIID

**Full-On-Gain Response**

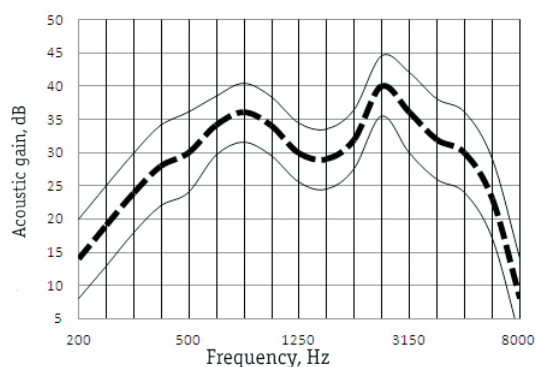

**OSPL90 Response**

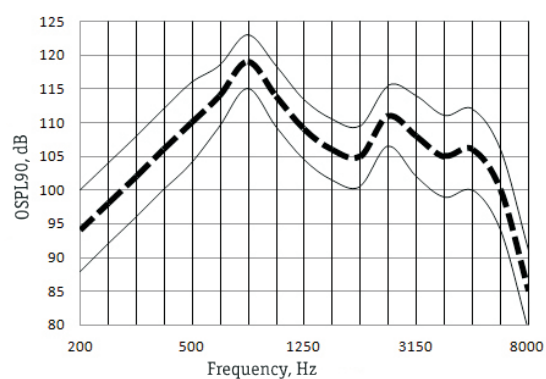

## Main features

In accordance with IEC 60118-7 (2 cc coupler)

Full-on-Gain Peak, dB	40±5
Max. Output (OSPL90), dB	119±4
Frequency Range, Hz	200-7000
Equivalent Input Noise, dBA, max	26
Total Harmonic Distortion at RTG, % max	2
Maximum Telecoil Sensitivity, FOG input 10mA/m at RTF, dB	80
WDRC channels	8
Memories	4
Equalizer bands	12
Battery Current at RTG, mA, max	1,2
Battery Type	10
Battery Life, hrs, average	120
Mass w/o battery, g, max	3