

Analog BTE medium power Hearing Aid with peak-clipping function

Features:

- Volume control
- Telecoil

Trimmers:

- H – low frequency control
- P – maximum power output control

Mode switch:


- O – Off
- T – telecoil
- M – microphone

- Peak-clipping function for comfortable listening
- Reliable battery compartment
- Classical case design proved by time
- Laser marking




Analog Hearing Aid with peak-clipping and telecoil for mild and moderate loss

Suggested fitting range

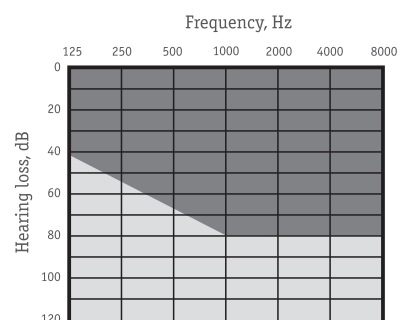


Classica M34


OSPL90 Response

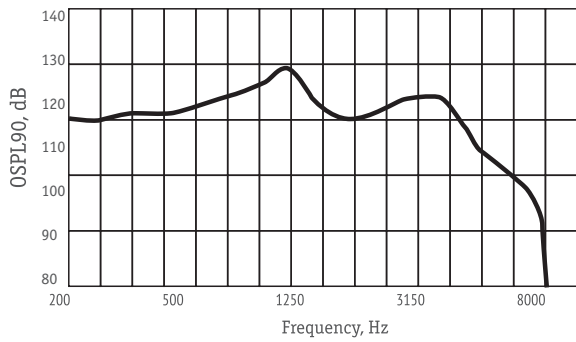


Full-on-gain Response

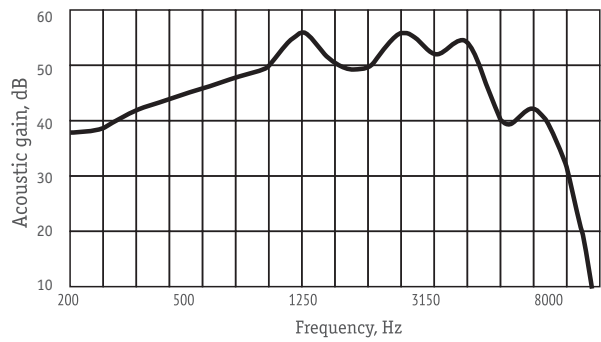

OSPL Response

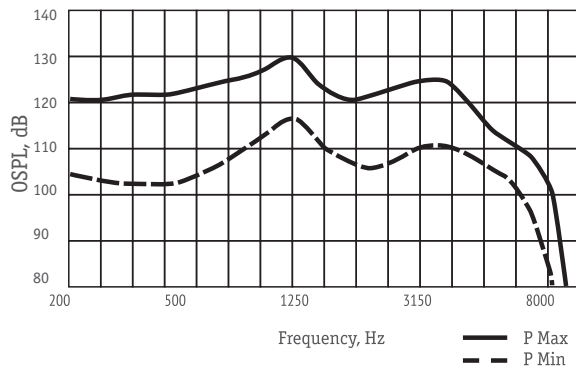

Low frequency control

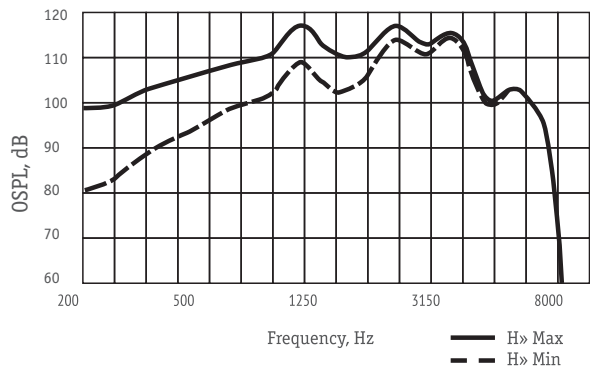

Performance data In accordance with IEC 60118-7 (2 cc coupler)

Full-on-Gain Peak., dB		56±5
Full-on-Gain at 1.6 κΩ, dB		51±5
Max. Output (OSPL90), dB		129±4
Frequency Range, Hz,		200-5800
Equivalent Input Noise, dBA, max		28
Total Harmonic Distortion at RTG, % max	500 Hz	5
	800 Hz	
	1600 Hz	
Maximum Telecoil Sensitivity, FOG input 10mA/m at RTF, dB		97
Volume Control Range, dB		50
Battery Current at RTG, mA, max		2,5
Battery Type		675
Battery voltage, V		1,3
Battery Life, hrs, average		280
Mass w/o battery, g, max		5