


## Digital BTE 8 channel Hearing Aid with Open Fit technology


### Features:

- Volume control
- Memory choice button
- Programmable telecoil
- Audio Input
- 12-band equalizer
- Tinnitus-masker (TinniMask)
- Tone generator for In-Situ fitting
- 8 channel WDRC
- Up to 5 memories
- Open Fit earmolds
  
- Advanced Adaptive Feedback Cancellation (Feedback Fighter)
- 12-band Layered Noise Cancellation (NoiseOFF)
- Dynamic Contrast Detection for soft speech enhancing (SpeechKey)
  
- Work Diary
- Input Signals Mixing (MixIn)
- Programmable low battery signals
- Programmable memory change signals
- Programmable power-on delay

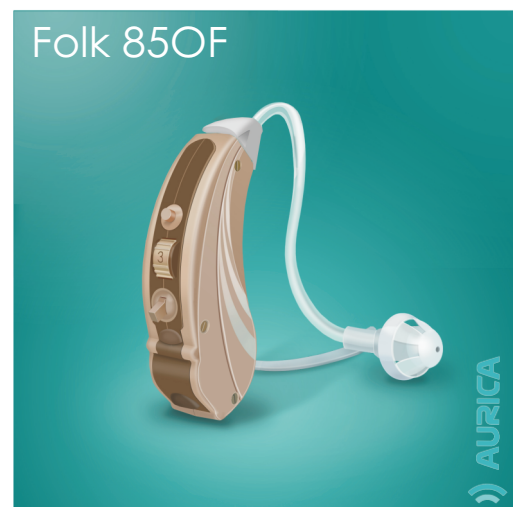


Digital 8-channels Hearing Aid with 5 memories for mild and moderate losses

### Suggested fitting range

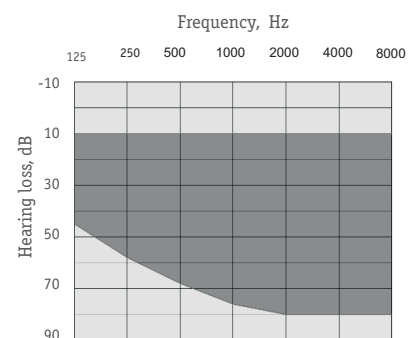


# Folk 850F

**Full-On-Gain Response**

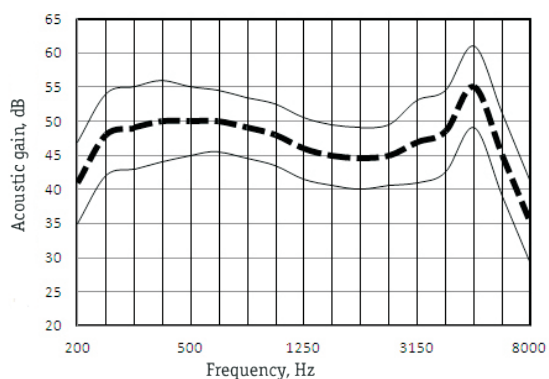

**OSPL90 Response**

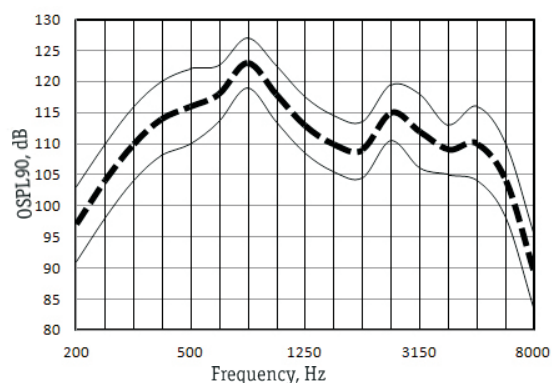

## Main features

### In accordance with IEC 60118-7 (2 cc coupler)

Full-on-Gain Peak, dB	55±5
Max. Output (OSPL90), dB	123±4
Frequency Range, Hz	150-7100
Equivalent Input Noise, dBA, max	24
Total Harmonic Distortion at RTG, % max	5
Maximum Telecoil Sensitivity, FOG input 10mA/m at RTF, dB	93
WDRC channels	8
Memories	5
Equalizer bands	12
Battery Current at RTG, mA, max	1,0
Battery Type	13
Battery Life, hrs, average	460
Mass w/o battery, g, max	5